


## **Dutchwest Specs for Models:**

2460, 2461, 2462, 2477, 2181, 2478, 2479, 2183, 2465, 2466


Dutchwest Small Convection (2460), Large Convection (2461) and Extra Large Convection (2462)

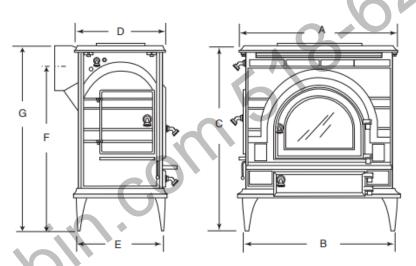

Stove Model Number	2460	2461	2462
A	22" (560 mm)	25¾" (654 mm)	28¼" (717 mm)
В	21" (530 mm)	24½" (620 mm)	27" (690 mm)
C	29¾" (754 mm)	30" (760 mm)	33" (840 mm)
D	16" (410 mm)	16" (410 mm)	18¼" (467 mm)
E	14¾" (375 mm)	14%" (380 mm)	17" (430 mm)
F	26¾" (683 mm)	27" (690 mm)	30 <b>1/a</b> " (763 mm)
G	29¾" (754 mm)	30" (760 mm)	33" (840 mm)
Log length:	19" (480 mm)	22" (560 mm)	25" (640 mm)
Maximum burn time <sup>1</sup> :	8 hrs.	9 hrs.	12 hrs.
Average area heated (sq. ft.) <sup>2</sup> :	700-1,400 (65-130m <sup>2</sup> )	800-1,600 (75-150m <sup>2</sup> )	1,200-2,400 (112-224m <sup>2</sup> )
Range of heat output <sup>4</sup> :	7,800 - 26,800 Btu/hr.	11,300 - 26,800 Btu/hr.	10,500-27,700 Btu/hr <sup>5</sup>
Maximum heat output:	35,000 Btu/hr.	40,000 Btu/hr.	55,000 Btu/hr.
EPA emissions rating4 (g/h, catalytic):	1.1	1.4	1.3
Efficiency, HHV <sup>6</sup>	81%	77%	76%
Weight:	380 lbs. (172 kg)	436 lbs. (198 kg)	634 lbs. (288 kg)
Loading:	Side or front	Side or front	Side or front
Flue exit position (reversible):	Top or rear	Top or rear	Top or rear
Air controls:	2 controls	2 controls	2 controls

Dutchwest Non-Catalytic Small (2477), Medium (2478), Large (2479)

\*\*Note: Models 2477 and 2181 Share Specs, and Models 2479 and 2183 share specs\*\*

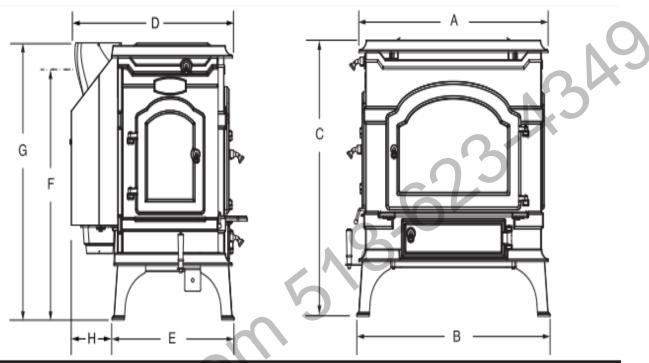

MODEL	Small (2477)	Medium (2478)	Large (2479)		
Α	24" (610 mm)	26¾" (683 mm)	291/4" (743 mm)		
В	24½" (622 mm)	271/4" (695 mm)	29¾" (756 mm)		
C	29¾ (756 mm)	29¾" (756 mm)	32½" (826 mm)		
D	23" (584 mm)	23" (584 mm)	24½" (622 mm)		
E	17½" (445 mm)	171/2" (445 mm)	19" (483 mm)		
F	27" (686 mm)	271/4" (692 mm)	301/4" (768 mm)		
CENTER OF FLUE COLLAR, REAR EXIT					
G	30½" (775 mm)	30½" (775 mm)	34" (864 mm)		
Н	5¾" (146 mm)	5¾" (146 mm)	5¾" (146 mm)		

