





## Resolute Acclaim Model 0041 Arch Insert Instructions

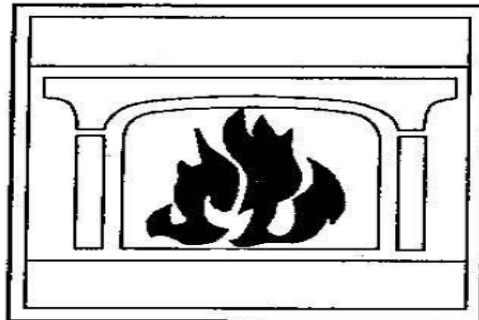

#200-8874


### Installation Instructions Fireback Arch Inserts

#### For the Resolute Acclaim™ Model #0041

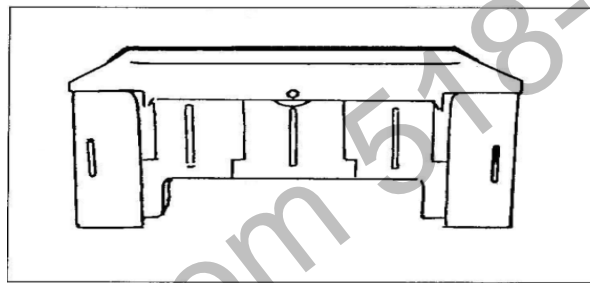

The Resolute Acclaim fireback is designed with arch inserts that can easily be replaced when necessary. The inserts in a stove used as a primary heat source may need replacing each season, while those used only occasionally for pleasure viewing may last indefinitely.

Examine the fireback arch inserts each season when you have removed the lower fireback to vacuum the refractory chamber exhaust channels (See the Maintenance Section of your Resolute Acclaim Owner's Guide for details on this procedure).

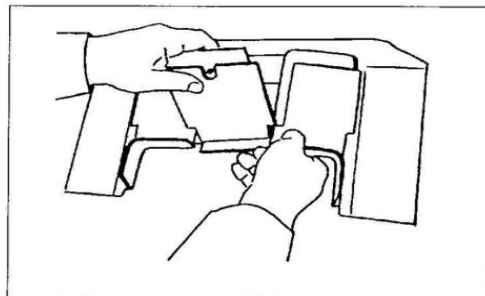

To replace the arch inserts:

- Lay the fireback assembly face down on a flat surface; observe and note how it goes back together.
- Loosen the hex head cap screw visible in the center of the assembly. Clean the left, right and center arch inserts, and the fireback with a wire brush, paying particular

attention to the joint areas. Inspect the parts for cracks, warpage and general deterioration. Replace if necessary.

- Referring to the accompanying illustration, place the left and right arch inserts into position, with the vertical ribs facing downward and the inserts properly mated to the fireback grooves.
- Start the center arch piece into the interlocking surfaces of the right and left arch inserts at a 45-degree angle. Align the three arch inserts. Attach the center insert to the fireback with the hex head cap screw. Insert the screw from the front (ribbed) side and secure it with a square nut on the back (smooth) side.
- Reinstall the assembly as directed in the Maintenance Section of your Resolute Acclaim Owner's Guide.

© April 1994, Vermont Castings, Inc.  
Parts and specifications subject to change without notice.  
Printed in the U.S.A.