

#SF36-500 LOG SET

NOTE: Log numbers are located on the bottom of each log. Refer to the following instructions and illustrations for proper log placement. Your components may look different than the ones shown.

CAUTION: Do not place logs directly over burner port holes. Improper log placement may affect flame appearance, and may cause excessive soot to build upon the glass.

1. Position the ember panel in front of the burner assembly.
2. Position the holes in the bottom of log SF36-1 onto the (2) mounting pins at the back of the burner assembly.
3. Position the holes in the bottom of SF36-2 and SF36-3 onto the corresponding mounting pins on the burner.
4. Position the hole in the bottom of log SF36-4 onto the corresponding mounting pin on the burner.
5. Position the holes in the bottom of log SF36-5 onto the corresponding (2) mounting pins on the burner.
6. Position log SF36-6 as shown. Position SF36-6 with the notch in SF36-2, and align the hole on the bottom with the pin on the left of SF36-1. Set log SF36-6 into position.
7. Position log SF36-8 as shown. Position SF36-8 with the notch in SF36-3, and align the hole on the bottom with the pin on the right of SF36-1. Set log SF36-8 into position.
8. Position logs SF36-9, SF36-7, and SF36-10 as shown.
9. Use a steel or stiff bristle nylon brush to distribute rock wool embers onto logs and burner.

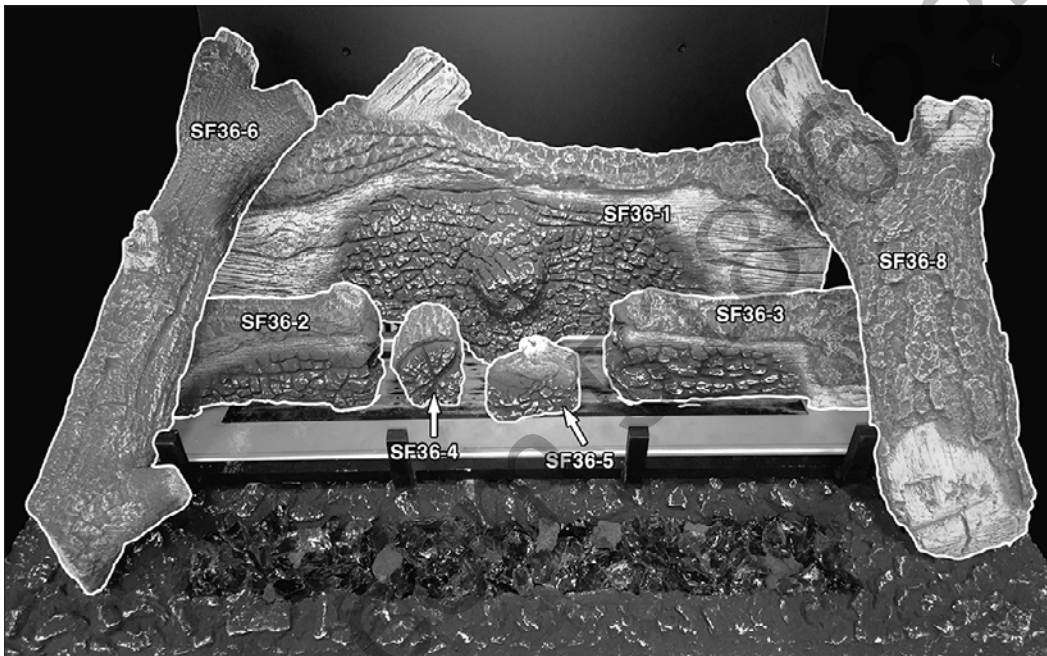


Figure 1, Base Logs



Figure 2, Completed Installation